

(

)

Drying Rate Tester-Air Flow Method

: RF4008AF



US AATCC 200-2013.

F4008AF

USB-

_____ :


(

-).

_____ : AATCC 200-2013

3816-81 (811-81).

ISO 6330-2011

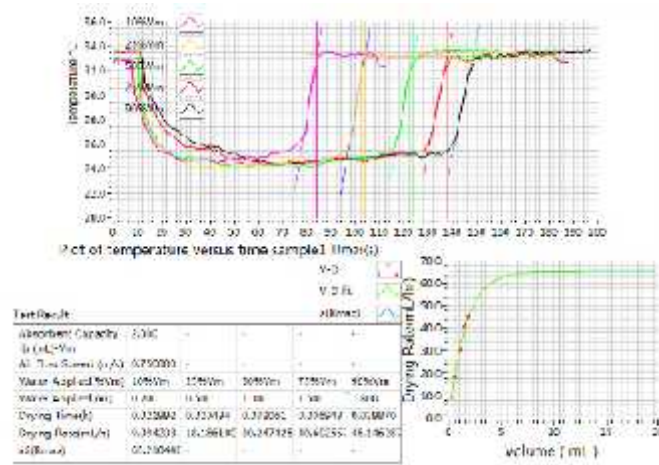

1. : 165±1() × 165±1() × 27.5±1()
2. : 130,0±1
3. : 0-5±0,1 /
4. - : 15-50±0,1°C
5. : 0-1±0,0005
6. : USB-
7. :
8. :
9. : USB-
10. : ~220 , 50/60 , 3
11. : 500() × 500() × 560()
12. : 40

- RF4008AF
- RF4008AF/1
- RF4008AF/2
- RF4008AF/3
- RF4008AF/4 USB-
- RF4008AF/5 USB-

